

Dynagard

Single-point Gas Monitor



Dynagard Single-point Gas Monitor

- AutoCal[®] automatic calibration
- Smart sensor technology
- Digital display / control connection
- Internal push-button alarm settings

GfG Instrumentation


1194 Oak Valley Dr, Ste 20, Ann Arbor MI 48108 USA
(800) 959-0329 • (734) 769-0573 • www.goodforgas.com

Single-point Area Monitors

Dynagard AutoCal® monitors are single point detection instruments that accurately measure toxic gases and oxygen levels. Alarm lights on the front panel illuminate and an internal horn sounds when gas concentrations are exceeded.

Simple and effective

The units accurately display values on a large backlit LED and can transmit a linear 4-20 mA output. AutoCal® calibration and maintenance is done effortlessly through front panel push-buttons. Smart sensors enable the user to change measuring ranges or gas types in the field without a need for additional programming. The Dynagard is equipped with onboard relays for two adjustable alarm points. It also has one sensor fault for local connection and activation or deactivation of external devices like strobes, fans, auto dialers etc.

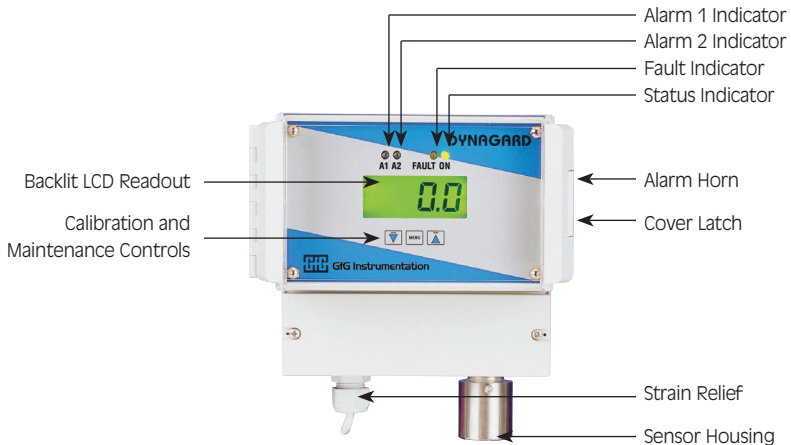

Specifications

Gases*

- Ammonia (NH₃)
- Carbon Monoxide (CO)
- Chlorine (Cl₂)
- Chlorine Dioxide (ClO₂)
- Ethylene Oxide (C₂H₄O)
- Hydrogen (H₂)
- Hydrogen Chloride (HCl)
- Hydrogen Cyanide (HCN)
- Hydrogen Sulfide (H₂S)
- Nitrogen Dioxide (NO₂)
- Oxygen (O₂)
- Sulfur Dioxide (SO₂)

Detection Ranges*

C ₂ H ₄ O	0-20 ppm
Cl ₂	0-50 or 250 ppm
ClO ₂	0-1.0 ppm
CO	0-500 or 2,000 ppm
H ₂	0-2,000 ppm or 0-4% volume
H ₂ S	0-200 or 1,000 ppm
HCl	0-30 ppm
HCN	0-200 ppm
NH ₃	0-200 or 1,000 ppm
NO ₂	0-50 or 200 ppm
O ₂	0-25% volume
SO ₂	0-50 or 500 ppm

*Additional gases and ranges available (consult manufacturer)

Detection Principle

Electrochemical

Detection Method

Diffusion

Response Time

T₉₀ <5 sec. (depending on gas)

Expected Sensor Life

2 years (depending on gas)

Display

4 digit LCD
Power, alarm and fault LED's

Power Supply

115 VAC / 24 VDC

Output Signal

Linear 4-20 mA

Relays

2 alarm points, 1 fault – voltage free
Voltage: 250 VAC 50/60 Hz or 250 VDC maximum
Current: 4 A AC/DC maximum

Horn

2 years

Temperature Range

+5 to +115°F / -15 to +46°C

Humidity Range

15 to 96% rh

Pressure Range

920 to 1,080 hPa

Housing

UL 94 HB polystyrene enclosure with clear poly carbonate lid

Weight

2 pounds (907 g)

Dimensions

7.9x7.5x4.8 inches (200x190x120 cm)
(HxWxD)

Housing Approvals

IP 65

Accessories

Remote di95 dB at one foot I

Specifications subject to change without notification

Distributed by:

Electronic Measurement Labs, Inc.
Sales • Service • Support
24/7/365 Tech Support
800-452-6822

**"Best in Gas
Detection"**



GfG Instrumentation

Tel: (800) 959-0329 or (734) 769-0573
Fax: (734) 769-1888
E-mail: info@gfg-inc.com
Website: www.goodforgas.com

Rev. 4 (01/30/17)