

# Transmitter IR 24

Highly selective, substance specific IR Sensor



- No false response due to interfering contaminants
- Extremely stable, low maintenance system
- MWG with infrared (NDIR) sensor
- One-person calibration on-site
- Energized IR sensor head can be replaced in Ex Zone 0 areas
- Output 0.2-1 mA or 4-20 mA

# Remote Sensor with NDIR Sensor for Carbon Dioxide



## CO<sub>2</sub> - a toxic hazard


Carbon dioxide (CO<sub>2</sub>) is often used as a work medium, or is stored, shipped, or generated as a by-product of certain industrial applications. The specific characteristics of CO<sub>2</sub> make this gas a hidden danger.

Carbon dioxide is odorless, tasteless, and undetectable to human senses. CO<sub>2</sub> is considerably heavier than air and can rapidly build to dangerous concentrations in holes, sewers, or cellars. Concentrations as low as 4 percent volume can be toxic, and 8 percent volume CO<sub>2</sub> can cause death. Carbon dioxide also displaces the oxygen content in the ambient air, which may lead to asphyxiation.

GfG Instrumentation's fixed gas warning systems allow continuous monitoring of gas hazards to ensure that countermeasures can be taken in time. A fixed gas monitoring system consists of a remote sensor which is connected by a cable to a controller such as the GMA 011, GMA 100, or GMA 300. The controller powers the remote sensor and evaluates its measurement signals.

## IR 24 for CO<sub>2</sub>


The remote sensor with its sensor cell is mainly responsible for the reliability of a gas monitoring system. The sensor is installed wherever CO<sub>2</sub> may be present. Even the lowest gas concentrations can be detected and transmitted to a central control station as current or voltage signals which are proportional to the actual gas concentration.

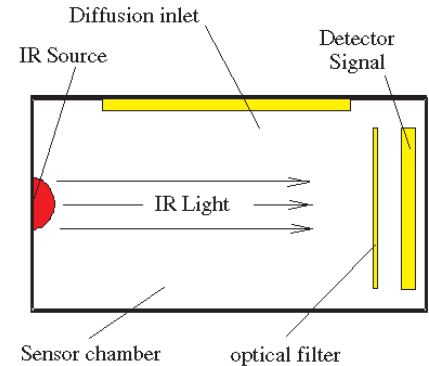

## IR 24 detection principle: infrared light

Since carbon dioxide (CO<sub>2</sub>) absorbs light in the infrared spectral range, the NDIR method used in the GfG sensor can measure the carbon dioxide concentration precisely and reliably. Infrared light is sent through the sensor chamber. Carbon dioxide absorbs a part of this light in a narrow spectral range, and the remaining light is measured at the detector. The difference between the light sent and received is proportional to the gas concentration. Water vapor or other gases that can be present in the sensor chamber do not affect the light absorption in this spectrum band.

## The effects of carbon dioxide

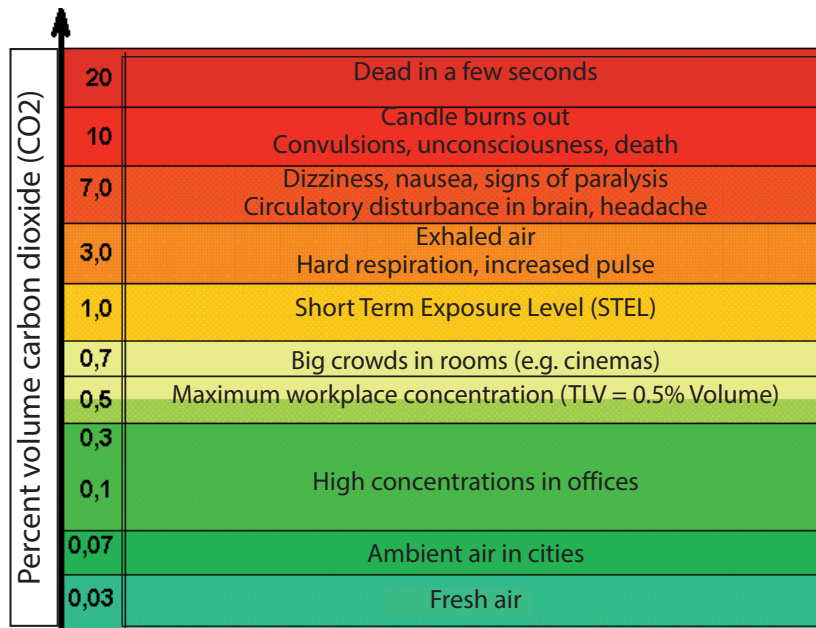

### Safe measurement results

Measurements using the precision of light allow high reliability and repeatability. THE IR principle is as precise as a fingerprint in criminology. Only carbon dioxide influences the measurement. This prevents false alarms by other gas components. GfG Instrumentation remote sensors include an electronic circuit for voltage stabilization of the output signal and temperature compensation. This ensures stable measurements over wide temperature ranges.

### Durable construction for long lifetime

The IR 24 does not contain any moving parts that are subject to wear and tear, ensuring a long lifetime, and low maintenance costs. More safety is provided by the permanent self-check and function test of the GMA controller. Sensor and electronics are protected in a solid enclosure from dust and water according to IP 54. This ensures that water cannot enter the detector, even in wet environments.



### Easy handling


Behind a service lid on the front of the IR 24 are potentiometers and test connectors for easy adjustment of zero point and detection range. This allows one-person calibration on-site and reduces service down-time.

### Quality control adds more safety

All remote sensors are made by GfG Instrumentation and have to pass a 100% quality and function test. All sensors are shipped pre-calibrated. An authorized GfG Instrumentation specialist makes the final adjustments during system installation.

## Summary of Features:

- Selective NDIR detection principle
- Extended sensor life for long-term economy
- Easy handling
- Signal output either 0.2-1 mA or 4-20 mA
- Potentiometers for easy adjustment of zero point and detection range
- Connectors for test of output signal
- Solid aluminum casing, IP 54
- High reliability and repeatability of measurement results
- Wide detection range

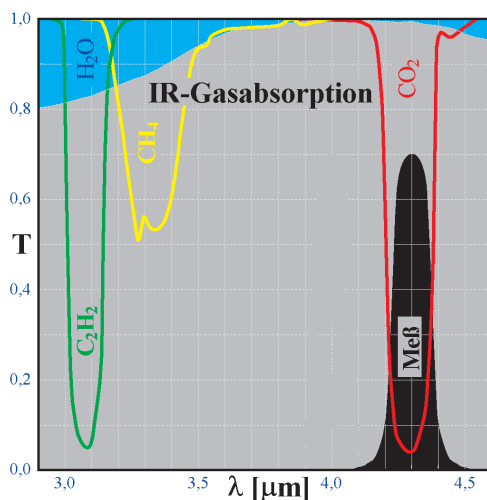

# Technical data

## IR 24 Transmitter - Remote sensor (MWG) 2490 IR

**Gases measured:**

Carbon dioxide (CO<sub>2</sub>)

**Measuring ranges:**

0 to 2% volume  
0 to 5% volume  
0 to 25% volume

**Sensor technology:**

Non-dispersive IR sensor (NDIR)  
Single beam system, temperature compensated

**Expected average sensor service life:**

5 years

**Sampling method:**

Diffusion

**Response time:**

T<sub>Alarm</sub> < 25 seconds

**Cable connection:**

3-wire transmitter

**Electrical characteristics:**

**Output signal:**  
0.2-1 mA or 4-20 mA

**Power supply:**

16 - 26 V, 100 mA

**Environmental conditions:**

**Temperature**  
Operation: +4°F to +104°F /  
-20°C to +40°C

**Air humidity**

0 to 99 % RH non-condensing

**Ambient pressure**

800 to 1,200 mbar

**Transmitter dimensions:**

5.7 x 0.4 x 3.1 in / 145 x 10 x 80 mm  
(H x W x D)

**Transmitter weight:**

31.5 ounces (900 grams)

**Protection class:**

IP 54

**Accessories:**

Sensor cable  
Protective casing

More Info/Order From:

**Electronic Measurement Labs, Inc.**

Sales • Service • Support

24/7/365 Tech Support

**800-452-6822**

**"Best in Gas  
Detection"**

*Specifications subject to change without notification*



USA and Canada info@gfg-inc.com  
Latin America info@gfg-inc.com  
Germany info@gfg-mbh.com  
South Africa gfgsa@icon.co.za  
Asia Pacific info@gasdetection.asia  
Europe info@gfgeurope.com  
Switzerland info@gfg.ch



**GfG Instrumentation**

1194 Oak Valley Drive, Suite 20, Ann Arbor, MI 48108 USA  
Phone: (734) 769-0573 • Toll Free (USA / Canada): (800) 959-0329  
Website: www.goodforgas.com • info@gfg-inc.com

Worldwide Manufacturer of Gas Detection Solutions  
Rev. 4 (02/13/17)